

A43 HALF PITCH IDC SOCKET WITH DUAL-SIDE CABLES

PITCH: 1.27mm * 1.27mm


SPECIFICATIONS

Material


Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical






Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding Voltage : 250V AC for 1minute
 Operating Temperature : -40°C to +105°C
 ▶ Terminated with L01-1.27mm pitch flat ribbon cable.
 ▶ Mating Suggestion : C76, C77 & C92 series.

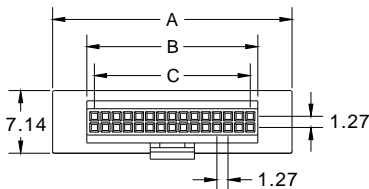

(TYPE A)

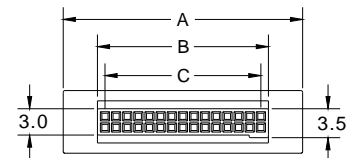

(TYPE B)

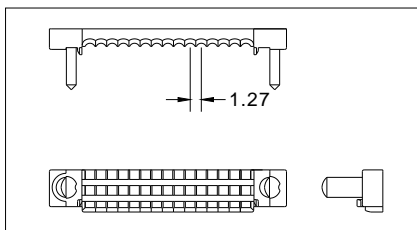

POSITION	A	B	C
10	14.68	6.76	5.08
20	21.03	13.11	11.43
30	27.38	19.46	17.78
40	33.73	25.81	24.13
50	40.08	32.16	30.48
60	46.43	38.51	36.83
70	52.78	44.86	43.18
80	59.13	51.21	49.53
90	65.48	57.56	55.88
100	71.83	63.91	62.23



How to order: A43 - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.TYPE	5.INSULATOR COLOR
10 20 30 40 50 60 70 80 90 100	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: TYPE A B: TYPE B	1. BLACK