

A26 SCSI-III D-SUB IDC (MALE)

PITCH: 1.27mm * 2.54mm

SPECIFICATIONS



Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze




Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding Voltage : 250V AC for 1minute
 Operating Temperature : -40°C to +105°C

- ▶ Terminated with L03-0.635mm pitch flat ribbon cable.
- ▶ Mating Suggestion : A27 series.

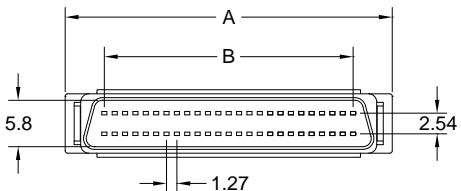

POSITION	A	B	C
40	33.62	24.13	29.72
50	39.97	30.48	36.07
68	51.40	41.91	47.50
80	59.02	49.53	55.12
100	71.72	62.23	67.82

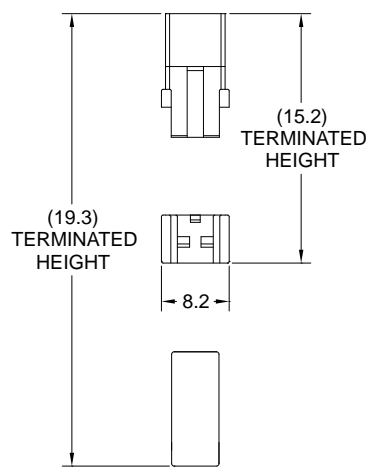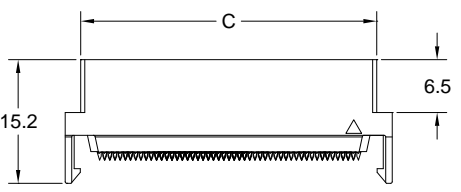

How to order: A26 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT MATERIAL	4.CONTACT PLATING
40 50 68 80 100	M: MALE	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH
5. SHELL	6.ACCESSORIES	7.INSULATOR COLOR	A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD
A: ALL PLASTIC	A: W STRAIN RELIEF B: W/O STRAIN RELIEF	1. BLACK	