

# A27 SCSI-III D-SUB IDC (FEMALE) 1.27 \* 2.54mm

**PITCH: 1.27mm \* 2.54mm**





## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0  
 Contact : Phosphor Bronze



### Electrical

Current Rating : 1 Amp  
 Contact Resistance : 30 mΩ max.  
 Insulation Resistance : 1000 MΩ min.  
 Dielectric Withstanding Voltage : 250V AC for 1minute  
 Operating Temperature : -40°C to +105°C  
 ▶ Terminated with L03-0.635mm pitch flat ribbon cable.  
 ▶ Mating Suggestion : A26 series.

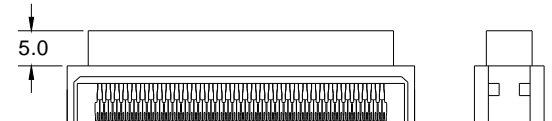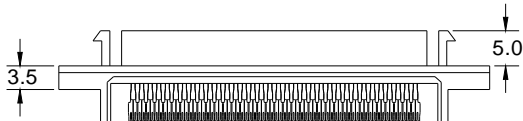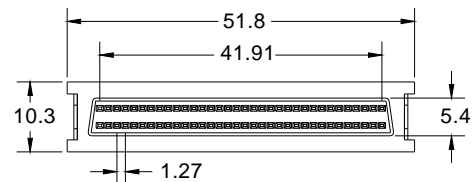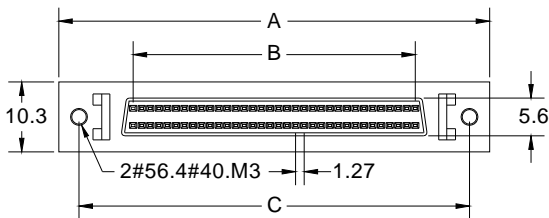

**METAL TYPE**

**PLASTIC TYPE**

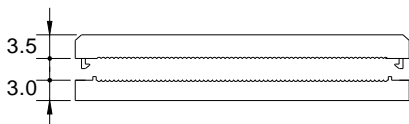

POSITION	A	B	C
50	52.60	30.48	46.50
68	64.03	41.91	57.93

**How to order:** A27 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT TYPE		3. CONTACT MATERIAL		4.CONTACT PLATING
50 68	F: FEMALE		B: PHOSPHOR BRONZE		T: TIN PLATED S: SELECTIVE G: GOLD FLASH O: 3u" INCH GOLD A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD
5. SHELL	6.MOUNTING METHOD	7.PARTS OPTION	8.ACCESSORIES	9.INSULATOR COLOR	
A: ALL PLASTIC B: METAL	A: THREAD INSERT 2-56 B: THREAD INSERT 4-40 C: THREAD INSERT M3 D: THREAD INSERT M2.6	A: W FRONT LATCH B: W/O FRONT LATCH	A: W SR B: W/O SR	1. BLACK	



**DON CONNEX**  
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885  
e-mail: info@donconnex.com.tw



Connector: E163339 | Flat cable: E162690  
Wiring Harnesses: E312257