

# A62a WIRE TO BOARD CONNECTOR (CRIMP HOUSING)

**PITCH: 1.27mm \* 2.54mm**

## SPECIFICATIONS

### Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0

### Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.





Insulation Resistance : 1000 MΩ min.

Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C

▶ Crimp Terminal Insertion : A62c series.

▶ Mating Suggestion : C13, C14 & C49 series.

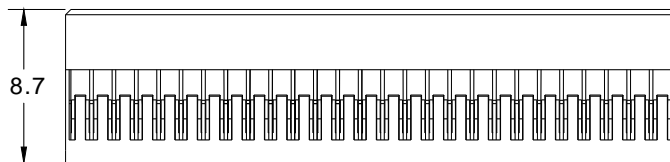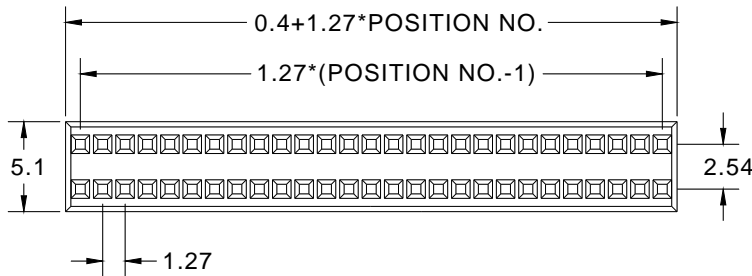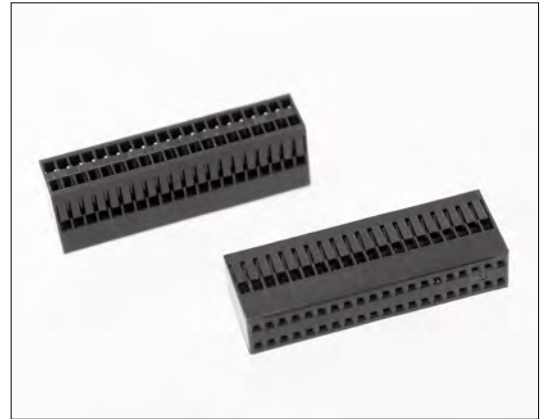

**How to order:** A62a - 1 - 2 - G(RoHS)

1.NO. OF CONTACT	2.INSULATOR COLOR
DUAL ROW 2*2 - 2*50	1. BLACK