

A05a IDC SOCKET (MULTI-CONTACT)

PITCH: 2.0mm * 2.0mm

SPECIFICATIONS


Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze


Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

- ▶ Terminated with L02-1.00mm pitch flat ribbon cable.
- ▶ Mating Suggestion : C05d, C05e, C05j, C06, C06d & C06g series.

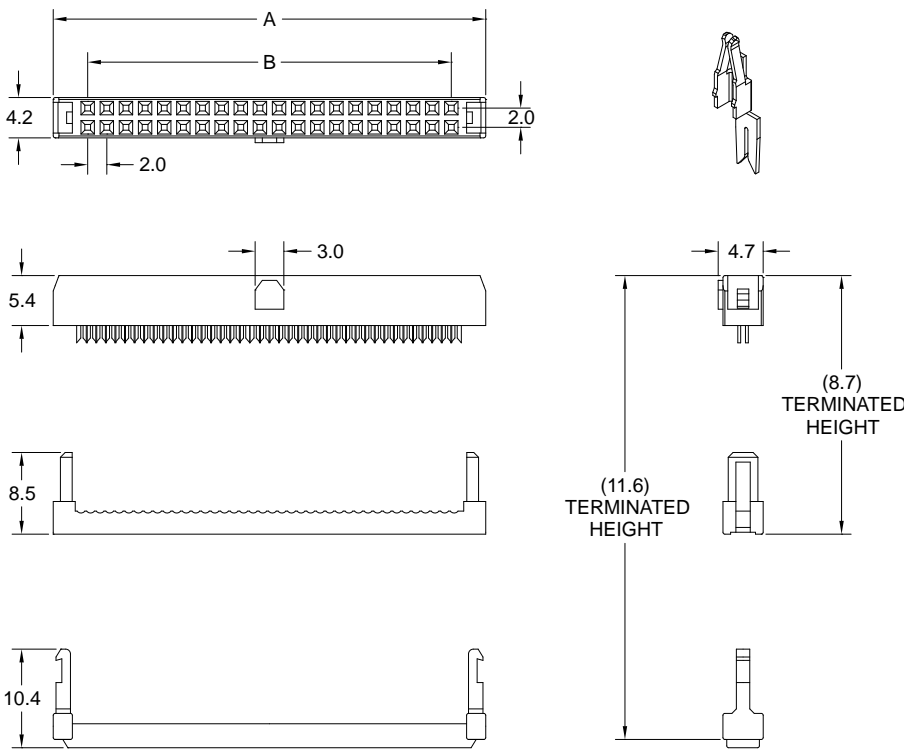

POSITION	A	B
6	11.3	4.0
8	13.3	6.0
10	15.3	8.0
12	17.3	10.0
14	19.3	12.0
16	21.3	14.0
20	25.3	18.0
22	27.3	20.0
24	29.3	22.0
26	31.3	24.0
28	33.3	26.0
30	35.3	28.0
34	39.3	32.0
40	45.3	38.0
44	49.3	42.0
50	55.3	48.0
60	65.3	58.0
68	73.3	66.0



CLOSE END COVER

How to order: A05a - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.SPECIAL FUNCTION	5.INSULATOR COLOR
06 08 10 12 14 16 20 22 24 26 28 30 34 40 44 50 60 68	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: W STRAIN RELIEF W BAR B: W/O STRAIN RELIEF W BAR C: W STRAIN RELIEF W/O BAR D: W/O STRAIN RELIEF W/O BAR	1. BLACK



DON CONNEX
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885
e-mail:info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257