

A56 DISCRETE WIRE IDC (RECEPTACLE)

PITCH: 2.0mm

SPECIFICATIONS



Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze




Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

► Terminated with UL Style 1571 or 1061
 #28AWG, #26AWG (Insulation O.D. 0.9 to 1.0mm)

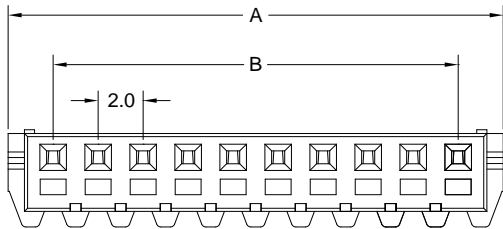

POSITION	A	B	C
2	6.0	2.0	4.55
3	8.0	4.0	6.55
4	10.0	6.0	8.55
5	12.0	8.0	10.55
6	14.0	10.0	12.55
7	16.0	12.0	14.55
8	18.0	14.0	16.55
9	20.0	16.0	18.55
10	22.0	18.0	20.55
11	24.0	20.0	22.55
12	26.0	22.0	24.55
13	28.0	24.0	26.55
14	30.0	26.0	28.55
15	32.0	28.0	30.55
16	34.0	30.0	32.55

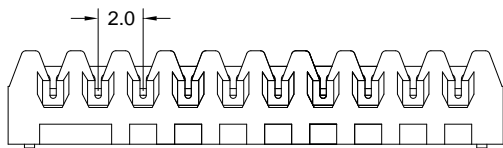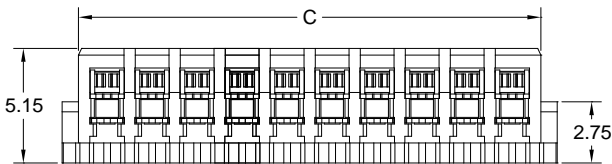

How to order: A56 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
02 03 04 05 06 07 08 09 10 11 12 13 14 15 16	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	3. BLUE 5. WHITE 7. GREEN