

A57 DISCRETE WIRE IDC (DIP PLUG)

PITCH: 2.0mm

SPECIFICATIONS


Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze




Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

► Terminated with UL Style 1571 or 1061
 #28AWG, #26AWG (Insulation O.D. 0.9 to 1.0mm)

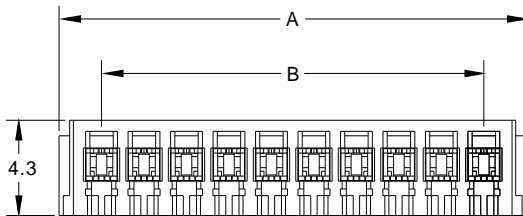

POSITION	A	B
2	6.0	2.0
3	8.0	4.0
4	10.0	6.0
5	12.0	8.0
6	14.0	10.0
7	16.0	12.0
8	18.0	14.0
9	20.0	16.0
10	22.0	18.0
11	24.0	20.0
12	26.0	22.0
13	28.0	24.0
14	30.0	26.0
15	32.0	28.0
16	34.0	30.0

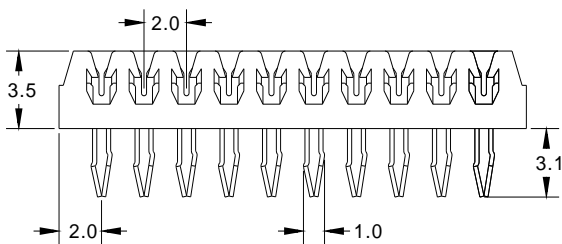

RECOMMENDED P.C.B. LAYOUT

How to order: A57 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
02 03 04 05 06 07 08 09 10 11 12 13 14 15 16	B: PHOSPHOR BRONZE	T: TIN PLATED	3. BLUE 5. WHITE 7. GREEN

