

A58 WIRE TO BOARD CONNECTOR WITH EAR (CRIMP HOUSING)

PITCH: 2.0mm * 2.0mm

SPECIFICATIONS

Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0

Electrical

Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.




Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1 minute


Operating Temperature : -40°C to +105°C

▶ Crimp Terminal Insertion : A58b series.

▶ Mating Suggestion : C05a, C05j, C06a, C06g & C06s series.

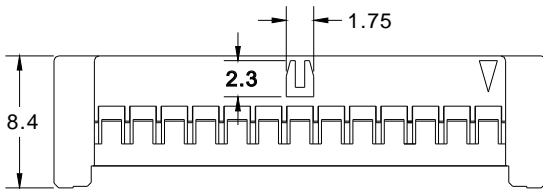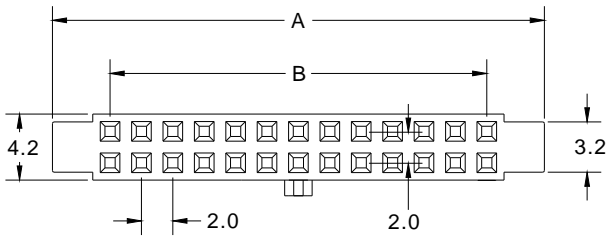

POSITION	A	B
6	11.34	4.00
8	13.34	6.00
10	15.34	8.00
12	17.34	10.00
14	19.34	12.00
16	21.34	14.00
20	25.35	18.00
22	27.34	20.00
24	29.34	22.00
26	31.34	24.00
30	35.34	28.00
34	39.34	32.00
40	45.34	38.00
44	49.34	42.00
50	55.34	48.00



How to order: A58 - 1 - 2 - G(RoHS)

1.NO. OF CONTACT	2.INSULATOR COLOR
06 08 10 12 14 16 20 22 24 26 30 34 40 44 50	1. BLACK

