




# A01s SPECIAL STRAIN RELIEF FOR A01

**PITCH: 2.54mm \* 2.54mm**



## SPECIFICATIONS

### Material

Insulator : PBT, rated UL 94V-0

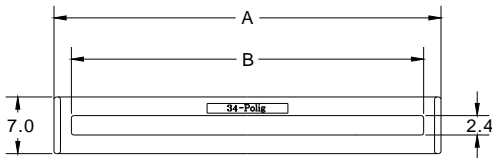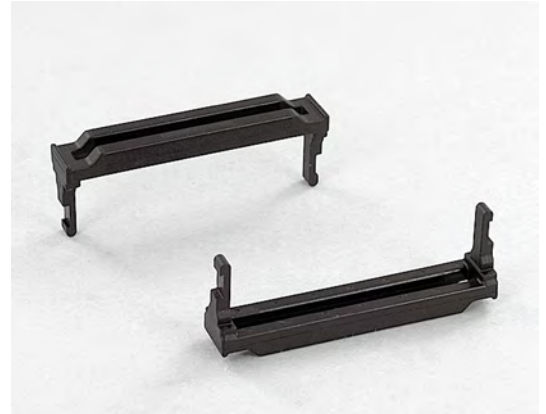

POSITION	A	B
6	12.32	8.02
8	14.86	10.56
10	17.40	13.10
12	19.94	15.64
14	22.48	18.18
16	25.02	20.72
20	30.10	25.80
24	35.18	30.88
26	37.72	33.42
30	42.80	38.50
34	47.88	43.58
36	50.42	46.12
40	55.50	51.20
44	60.58	56.28
50	68.20	63.90
56	75.82	71.52
60	80.90	76.60
62	83.44	79.14
64	85.98	81.68

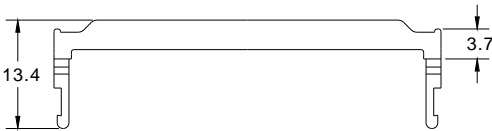

**How to order:** A01s -  -  - G(RoHS)

1.NO. OF CONTACT	2.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 34 36 40 44 50 56 60 62 64	1. BLACK



**DON CONNEX**  
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885  
e-mail:info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690  
Wiring Harnesses:E312257