




A03s SPECIAL STRAIN RELIEF FOR A03a

PITCH: 2.54mm * 2.54mm



SPECIFICATIONS

Material

Insulator : PBT, rated UL 94V-0

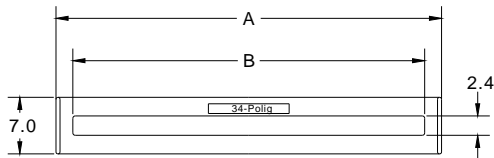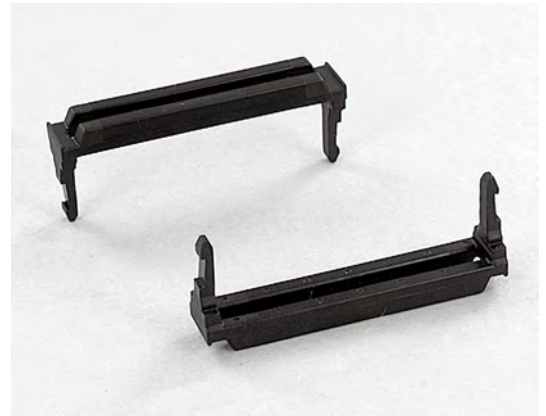

POSITION	A	B
6	12.20	8.02
8	14.74	10.56
10	17.28	13.10
12	19.82	15.64
14	22.36	18.18
16	24.90	20.72
20	29.98	25.80
24	35.06	30.88
26	37.60	33.42
30	42.68	38.50
34	47.76	43.58
36	50.30	46.12
40	55.38	51.20
44	60.46	56.28
50	68.08	63.90
60	80.78	76.60
64	85.86	81.68

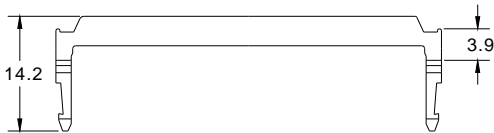

How to order: A03s - 1 - 2 - G(RoHS)

1.NO. OF CONTACT	2.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 34 36 40 44 50 60 64	1. BLACK



DON CONNEX
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885
e-mail:info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257