

A11e ZIGZAG DIP PLUG (.1"*.1") H:6.0mm

PITCH: 1.27mm * 2.54mm



SPECIFICATIONS

Material




Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C
 ▶ Terminated with L01-1.27mm pitch flat ribbon cable.

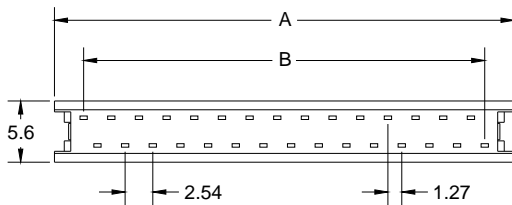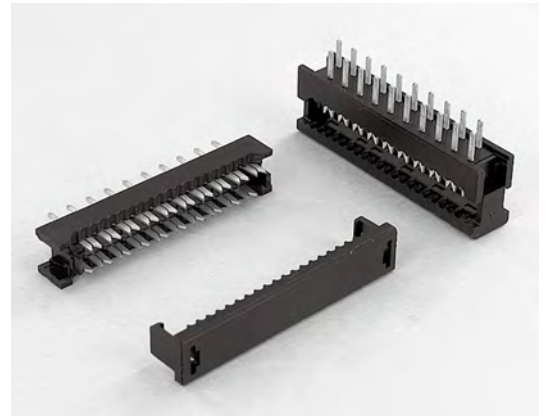

POSITION	A	B
6	11.72	6.35
8	14.26	8.89
10	16.80	11.43
12	19.34	13.97
14	21.88	16.51
16	24.42	19.05
20	29.50	24.13
24	34.58	29.21
26	37.12	31.75
30	42.20	36.83
32	44.74	39.37
34	47.28	41.91
40	54.90	49.53
50	67.60	62.23
60	80.30	74.93
64	85.38	80.01

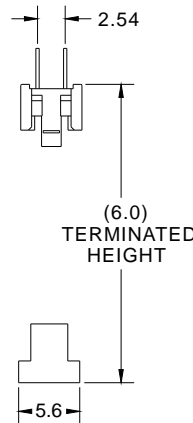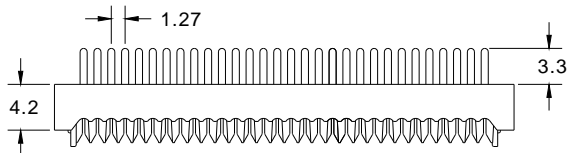

How to order: A11e - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 32 34 40 50 60 64	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK