

A28e MINI-SIZE CONNECTOR (MALE ON BOARD VERTICAL TYPE)

PITCH: 2.54mm * 1.5mm

SPECIFICATIONS



Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze




Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

► Mating Suggestion : A28b, A28c & A28d series.

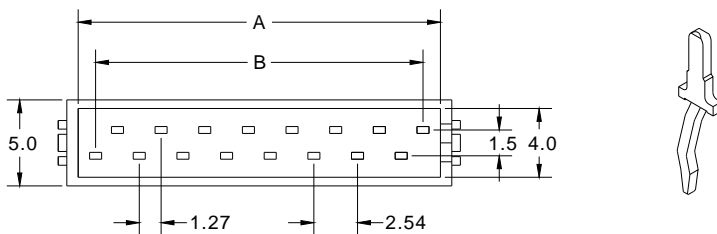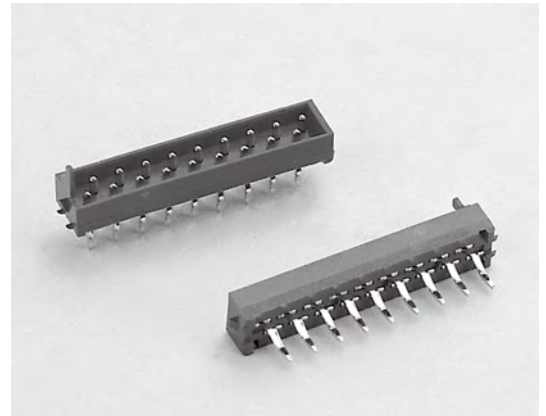

POSITION	A	B	C
4	5.84	3.81	7.16
6	8.38	6.35	9.70
8	10.92	8.89	12.24
10	13.46	11.43	14.78
12	16.00	13.97	17.32
14	18.54	16.51	19.86
16	21.08	19.05	22.40
18	23.62	21.59	24.94
20	26.16	24.13	27.48
22	28.70	26.67	30.02
24	31.24	29.21	32.56
26	33.78	31.75	35.10

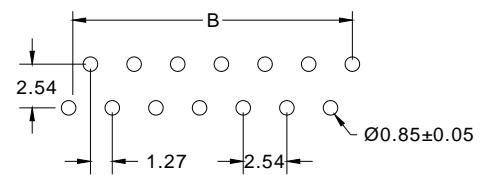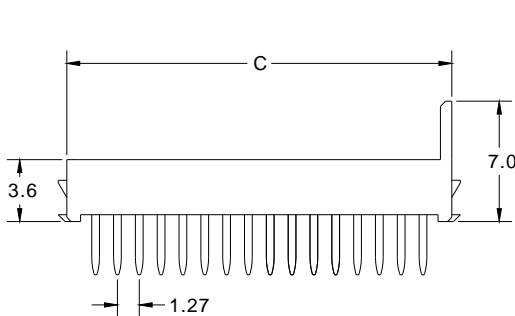

RECOMMENDED P.C.B LAYOUT

How to order: A28e - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
04 06 08 10 12 14 16 18 20 22 24 26	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	6. RED