

A37 D-SUB IDC FEMALE DUAL U-SLOT

PITCH: 2.77mm * 2.84mm











SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp for # 28AWG Cable
 1.5Amp for # 26AWG Cable
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C
 ▶ Terminated with L01-1.27mm pitch flat ribbon cable.
 ▶ Mating Suggestion : A36 series.

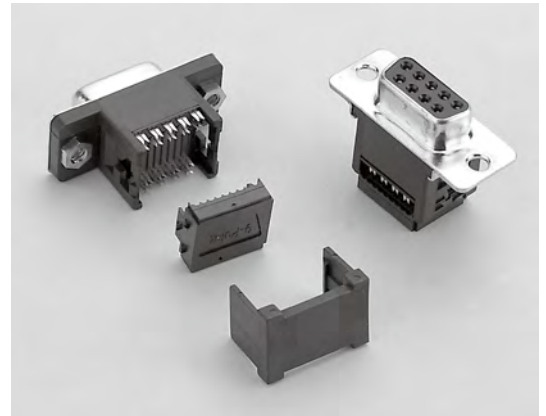

POSITION	A	B	C
9	30.80	25.00	16.30
15	39.20	33.30	24.60
25	53.05	47.04	38.30
37	69.40	63.50	54.80

How to order: A37 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - G(RoHS)

1.NO. OF CONTACT		2.CONTACT TYPE		3.CONTACT PLATING	
09 15 25 37		F: FEMALE		T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	
4.SHELL	5.MOUNTING METHOD	6.ACCESSORIES	7.INSULATOR COLOR		
B: METAL	A: THROUGH HOLE B: THREAD INSERT 4-40 UNC C: THREAD INSERT M3	A: W STRAIN RELIEF B: W/O STRAIN RELIEF	1. BLACK 2. GREY 3. BLUE		

