

L01a RAINBOW FLAT RIBBON CABLE

PITCH: 1.27mm

SPECIFICATIONS

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28AWG (7*0.127) Stranded Tinned Copper

#26AWG (7*0.16) Stranded Tinned Copper

Color : Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White, Black 10 Color Repeat

Electrical


Impedance : 115Ω (Unbalanced)

Capacitance : 12.2 pF/ft.

Inductance : .14uH/ft.

Propagation Delay : 1.4 ns/ft.

Insulation Resistance : 1GΩ/M min.

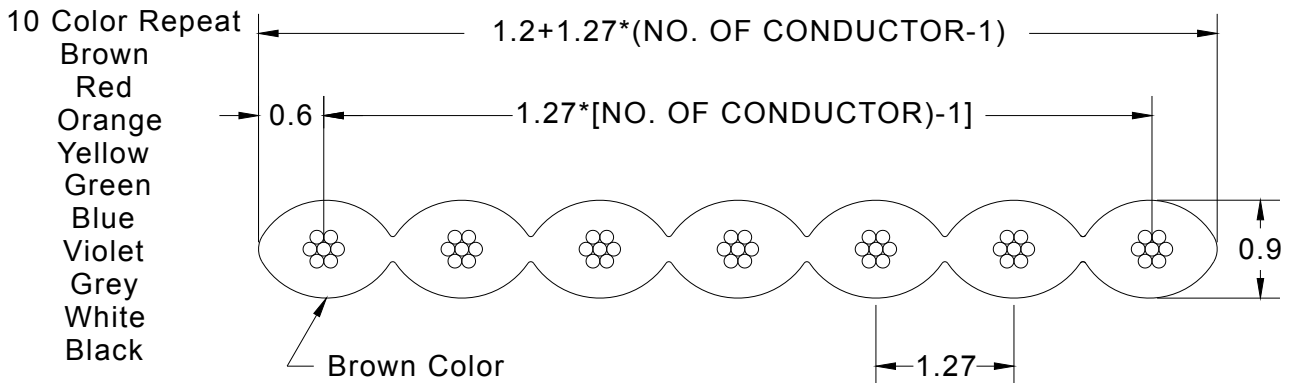

How to order: L01a - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.WIRE SIZE	4.CABLE LENGTH / UNIT
09 TO 64	P: PVC	A: 28 AWG B: 26 AWG	C: CM F: FEET I: INCH M: METER



DON CONNEX
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885
e-mail:info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257