

# L03 FLAT RIBBON CABLE

**PITCH: 0.635mm**

## SPECIFICATIONS

UL File No. : E162690

UL Style : 2678

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 150V

## Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #30AWG (7\*0.102) Stranded Tinned Copper

Color : Grey With Red Edge

## Electrical


Impedance : 75Ω (Unbalanced)

Capacitance : 22.5 pF/ft.

Inductance: .317 uH/ft

Propagation Delay : 1.7 ns/ft.

Insulation Resistance : 1GΩ /M min.

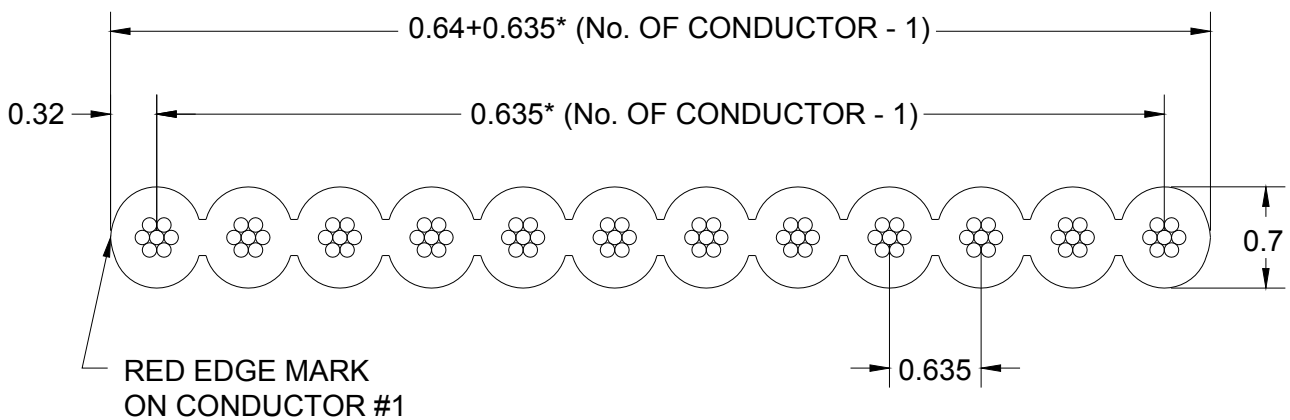

**How to order:** L03 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.CONDUCTOR OPTION	4.CABLE LENGTH / UNIT
10 TO 100	P: PVC	A: STRANDED TINNED COPPER	C: CM F: FEET I: INCH M: METER

