

L07 FLAT RIBBON CABLE

PITCH: 2.0mm

SPECIFICATIONS

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #26AWG (7*0.16) Stranded Tinned Copper

Color : Grey With Red Edge

Electrical


Impedance : 120Ω (Unbalanced)

Capacitance : 11.2 pF/ft.

Inductance : .14uH/ft.

Propagation Delay : 1.35 ns/ft.

Insulation Resistance : 1GΩ/M min.

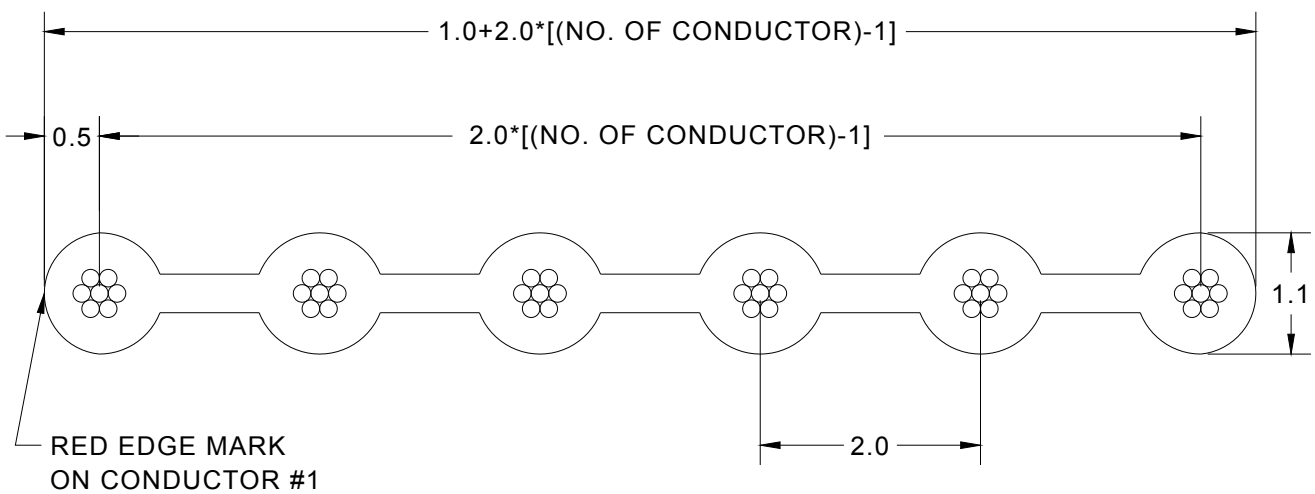

How to order: L07 - 1 - 2 - 3 - 4 - G(RoHS)

| 1.NO. OF CONDUCTOR | 2.INSULATION MATERIAL | 3.WIRE SIZE | 4.CABLE LENGTH / UNIT |
|--------------------|-----------------------|-------------|---|
| 04 TO 40 | P: PVC | B: 26 AWG | C: CM F: FEET I: INCH M: METER |

