

B31a FEMALE HEADER WITH SQUARE TAIL STR (H: 6.35mm)

PITCH: 2.0mm * 2.0mm

SPECIFICATIONS








Material

Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze


Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

► Mating Suggestion : C27, C28, C29 & C30 series.

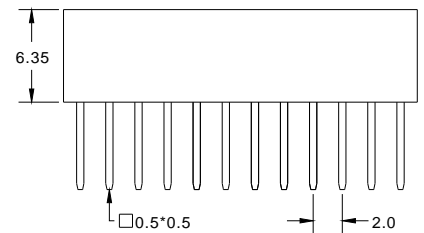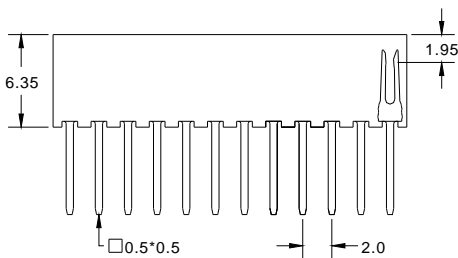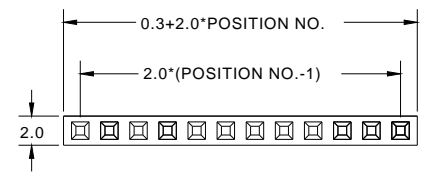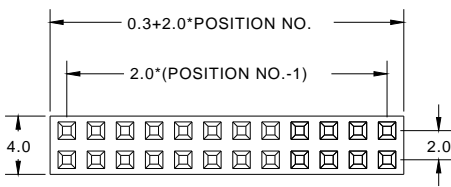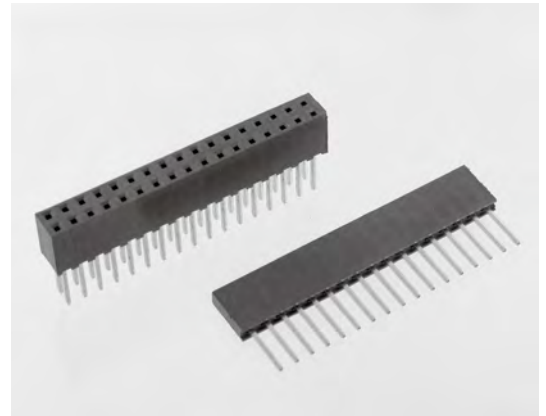

RECOMMEND P.C.B LAYOUT



RECOMMEND P.C.B LAYOUT



How to order: B31a - 1 - 2 - 3 - 4 - 5 - G(RoHS)

| 1.NO. OF CONTACT | 2.CONTACT MATERIAL | 3.CONTACT PLATING | 4.PIN LENGTH | 5.INSULATOR COLOR |
|--|--------------------|---|--|-------------------|
| SINGLE ROW 1*2 - 1*40 DUAL ROW 2*2 - 2*40 | B: PHOSPHOR BRONZE | T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD | A: 2.40mm B: 4.67mm C: 6.00mm D: 8.67mm E: 12.00mm F: 12.67mm | 1. BLACK |