

B48 FEMALE HEADER WITH POLARIZATION BUMP SMT (H: 4.5mm)

PITCH: 2.0mm * 2.0mm

SPECIFICATIONS



Material

Insulator : LCP, glass reinforced, rated UL 94V-0
Contact : Phosphor Bronze



Electrical

Current Rating : 1 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 3000 MΩ min.
Dielectric Withstanding Voltage : 500V AC for 1minute
Operating Temperature : -40°C to +105°C






► Mating Suggestion : C94, C94a & C94b series.

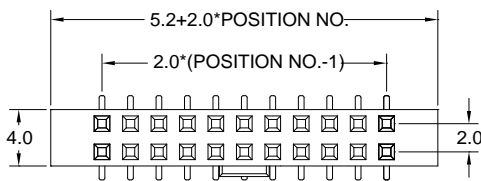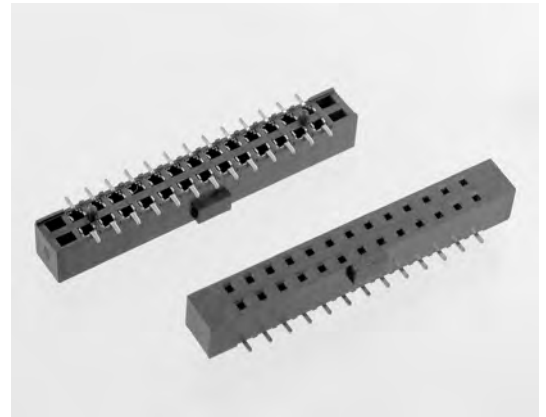


(TYPE A)

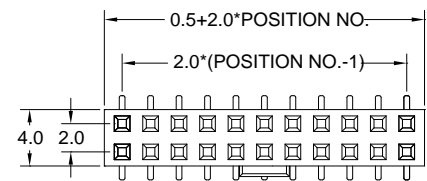

(TYPE B)

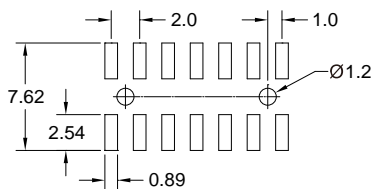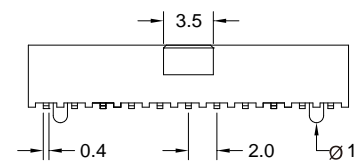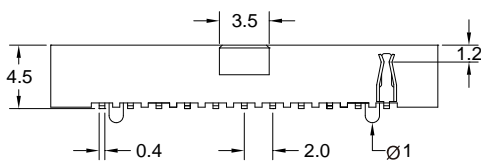

RECOMMENDED.P.C.B.LAYOUT

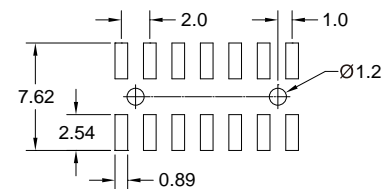

RECOMMENDED.P.C.B.LAYOUT

How to order: B48 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - G(RoHS)

1.NO. OF CONTACT		2.CONTACT MATERIAL		3.CONTACT PLATING
DUAL ROW 2*2 - 2*40		B: PHOSPHOR BRONZE		T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD
4.INSULATOR TYPE	5.SPECIAL FUNCTION	6.PACKAGING	7. INSULATOR COLOR	
A: TYPE A B: TYPE B	A:WITH LOCATING PEG B:W/O LOCATING PEG	A:TUBE WITH PAD B: TUBE W/O PAD C: TAPE & REEL WITH PAD	1. BLACK	

