

B53b ELEVATED QUAD ROW FEMALE HEADER WITH SQUARE TAIL (H: 6.35mm)

PITCH: 2.0mm * 2.0mm


SPECIFICATIONS

Material




Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C
 ► Mating Suggestion : C20a & C21b series.

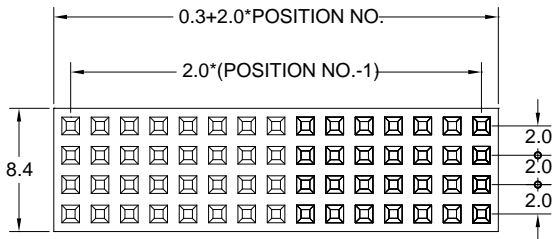

L	01	02	03	04	05
	11.02	12.35	15.02	18.35	19.02

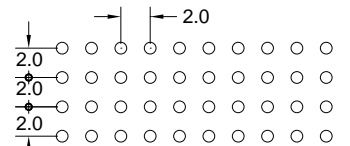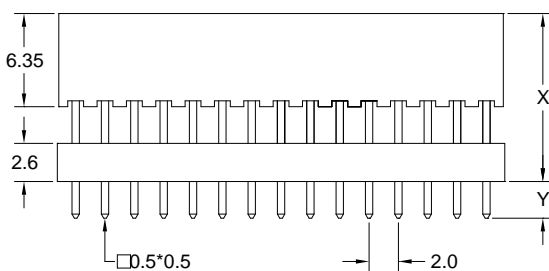

RECOMMENDED P.C.B LAYOUT

How to order: B53b - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR	5.LEAD STYLE
QUAD ROW 4*4 - 4*40	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK	X / Y

