

B23 FEMALE HEADER STR (H: 5.0mm)

PITCH: 2.54mm & 2.54mm * 2.54mm

SPECIFICATIONS



Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze


Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C






► Mating Suggestion : C15, C16, C17& C18 series.

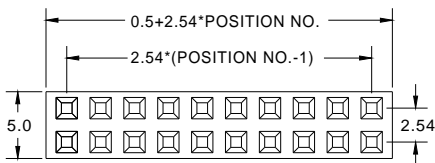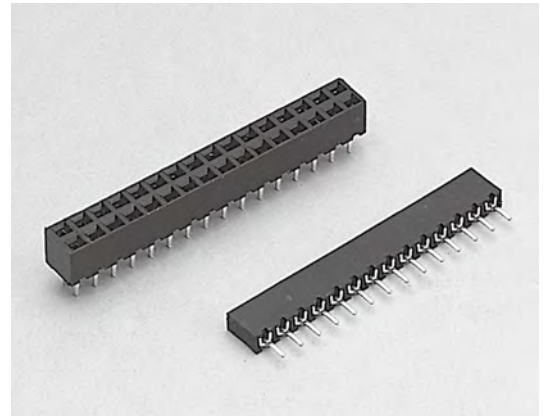


(TYPE A)

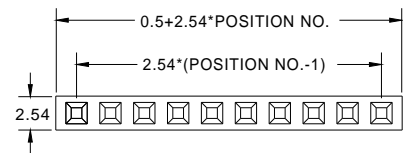

(TYPE B)

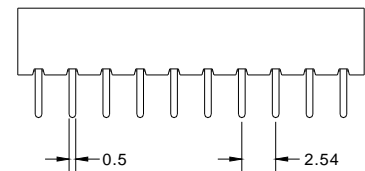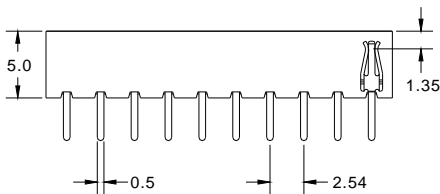

RECOMMENDED P.C.B. LAYOUT



RECOMMENDED P.C.B. LAYOUT

How to order: B23 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
SINGLE ROW 1*2 - 1*40 DUAL ROW 2*2 - 2*40	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK

