

C67 SHRUNK BOX HEADER SMT

PITCH: 1.27mm * 2.54mm

SPECIFICATIONS



Material

Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze




Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding Voltage : 250V AC for 1minute
 Operating Temperature : -40°C to +105°C

► Mating Suggestion : A06b series.

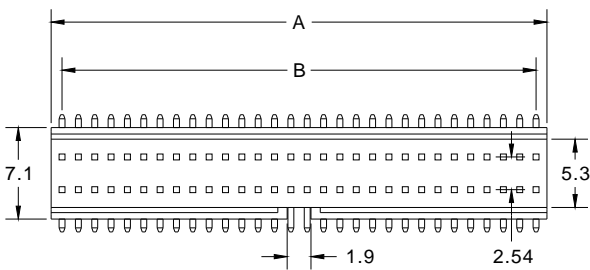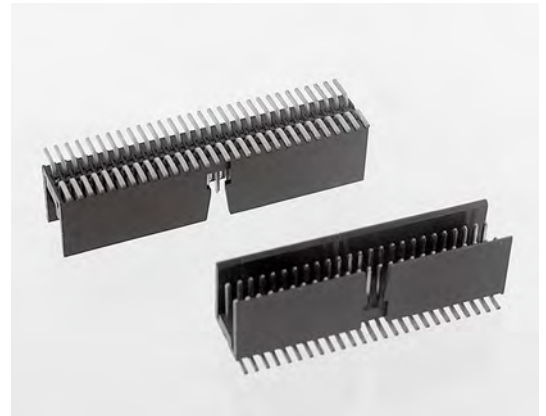

POSITION	A	B
10	6.77	5.08
20	13.12	11.43
26	16.93	15.24
30	19.47	17.78
34	22.01	20.32
40	25.82	24.13
50	32.17	30.48
60	38.52	36.83
68	43.60	41.91
80	51.22	49.53
100	63.92	62.23

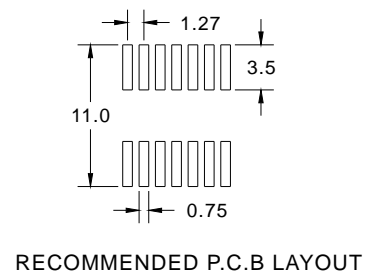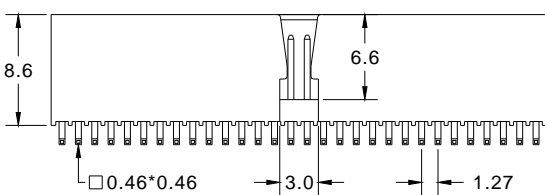

How to order: C67 - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.PACKAGING	5.INSULATOR COLOR
10 20 26 30 34 40 50 60 68 80 100	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A:TUBE WITH PAD B: TUBE W/O PAD C: TAPE & REEL WITH PAD	1. BLACK