

C102 RIBBON TYPE MALE HEADER SMT

PITCH: 2.0mm * 2.0mm








SPECIFICATIONS

Material


Insulator: LCP, glass reinforced, rated UL 94V-0
Contact: Phosphor Bronze

Electrical

Current Rating : 1 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 3000 MΩ min.
Dielectric Withstanding Voltage : 500V AC for 1minute
Operating Temperature : -40°C to +105°C
▶ Mating Suggestion: B58 & B59 series.

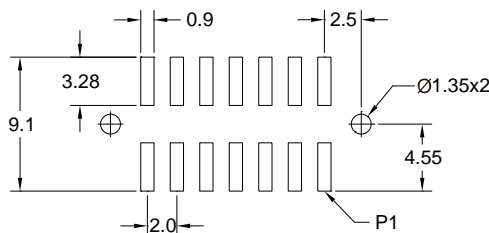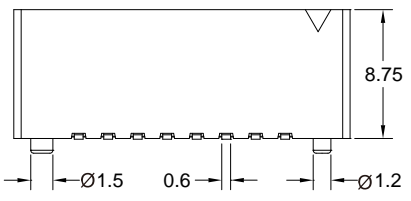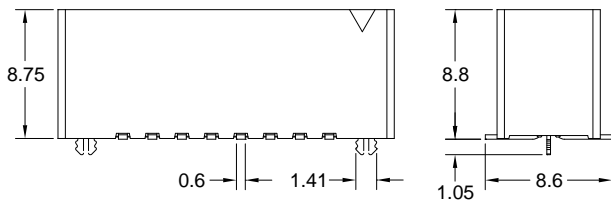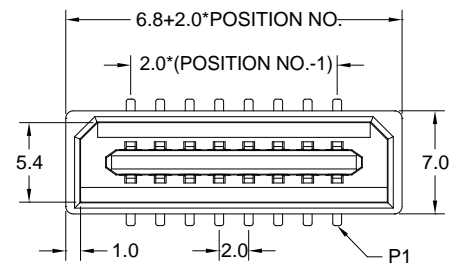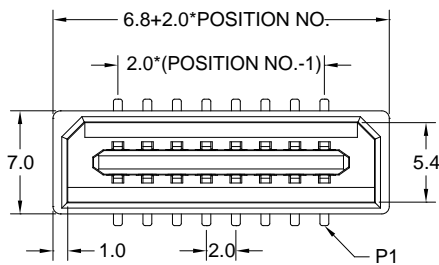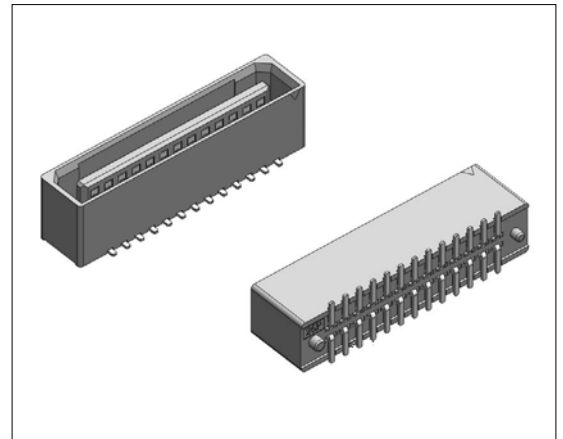

RECOMMENDED.P.C.B.LAYOUT

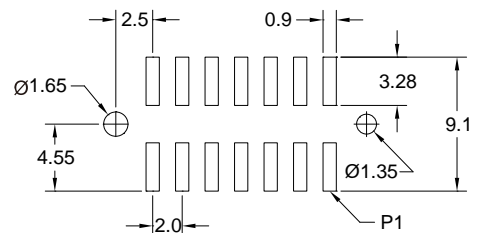

RECOMMENDED.P.C.B.LAYOUT

How to order: C102 - 1 - 2 - 3 - 4 - 5 - 6 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.SPECIAL FUNCTION	5.PACKAGING	6.INSULATOR COLOR
06 08 10 12 14 16 20 22 24 26 30 34 40 44 50 68 80	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: WITH PLASTIC LOCATING PEG B: W/O LOCATING PEG C: WITH METAL LOCKING CLIP	A: TUBE WITH PAD B: TUBE W/O PAD C: TAPE & REEL WITH PAD	1. BLACK

