

C06i SHROUDED HEADER PRESS-FIT TYPE STR

PITCH: 2.0mm * 2.0mm

SPECIFICATIONS






Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0
Contact : Brass

Electrical

Current Rating : 1 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 3000 MΩ min.
Dielectric Withstanding Voltage : 500V AC for 1minute
Operating Temperature : -40°C to +105°C


► Mating Suggestion : A05, A05g & A58 series.

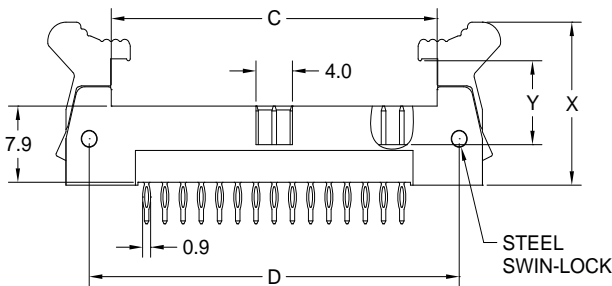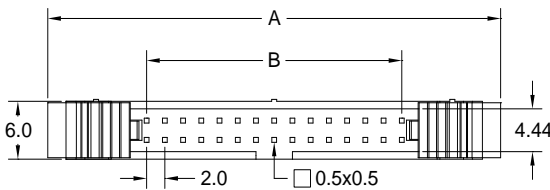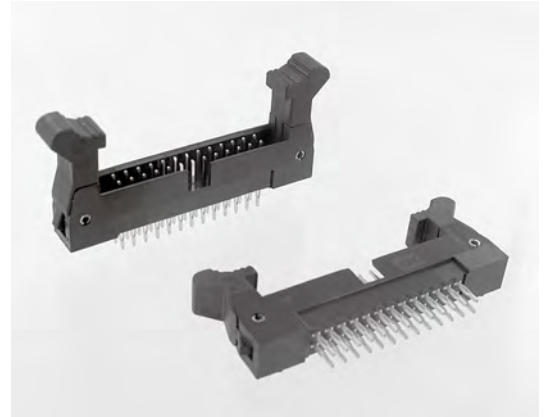

RECOMMENDED P.C.B LAYOUT

POSITION	A	B	C	D
8	27.70	6.00	13.76	18.60
10	29.70	8.00	15.76	20.60
12	31.70	10.00	17.76	22.60
14	33.70	12.00	19.76	24.60
16	35.70	14.00	21.76	26.60
20	39.70	18.00	25.76	30.60
22	41.70	20.00	27.76	32.60
24	43.70	22.00	29.76	34.60
26	45.70	24.00	31.76	36.60
30	49.70	28.00	35.76	40.60
34	53.70	32.00	39.76	44.60
40	59.70	38.00	45.76	50.60
44	63.70	42.00	49.76	54.60
50	69.70	48.00	55.76	60.60
68	87.70	66.00	73.76	78.60

ACCESSORIES	X	Y
LONG LATCH	19.9	11.4
SHORT LATCH	16.9	8.7

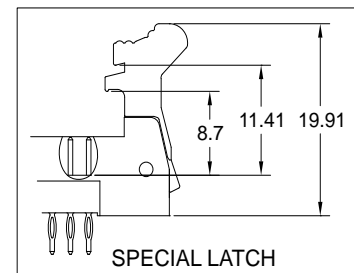

SPECIAL LATCH



How to order: C06i - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.ACCESSORIES	5.INSULATOR COLOR
08 10 12 14 16 20 22 24 26 30 34 40 44 50 68	A: BRASS	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: LONG LATCH B: SHORT LATCH C:SPECIAL LATCH	1. BLACK

