

# C98 BOX HEADER WITH LOCKING STR

**PITCH: 2.0mm \* 2.0mm**

## SPECIFICATIONS

### Material

Insulator : Nylon 66, glass reinforced, rated UL 94V-0

Contact : Brass

### Electrical

Current Rating : 1 Amp



Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.


Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

► Mating Suggestion : A05 & A05a series.

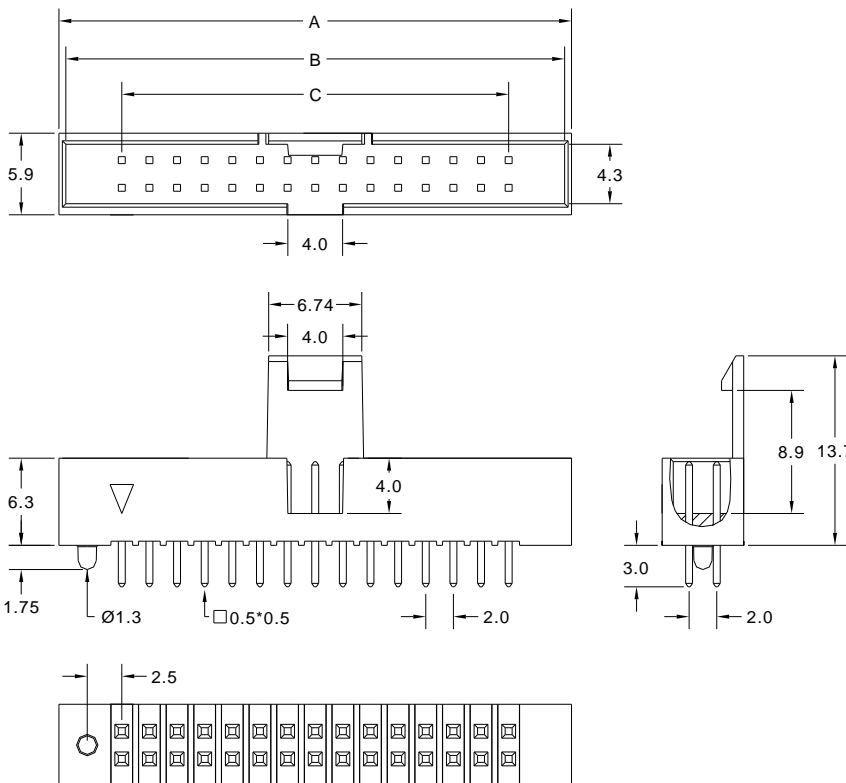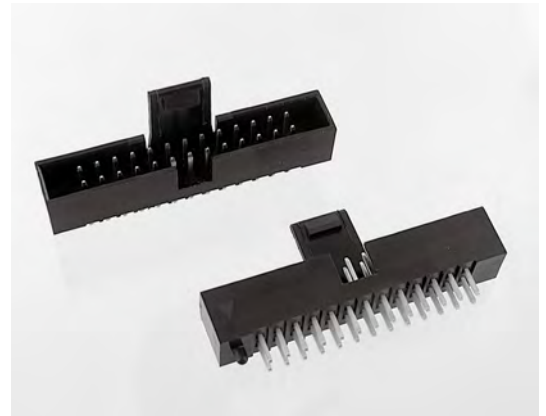

POSITION	A	B	C
6	13.1	12.1	4.0
8	15.1	14.1	6.0
10	17.1	16.1	8.0
12	19.1	18.1	10.0
14	21.1	20.1	12.0
16	23.1	22.1	14.0
20	27.1	26.1	18.0
22	29.1	28.1	20.0
24	31.1	30.1	22.0
26	33.1	32.1	24.0
30	37.1	36.1	28.0
34	41.1	40.1	32.0
40	47.1	46.1	38.0
44	51.1	50.1	42.0
50	57.1	56.1	48.0



**How to order:** C98 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
06 08 10 12 14 16 20 22 24 26 30 34 40 44 50	A: BRASS	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK