

C03b BOX HEADER STR SMT

PITCH: 2.54mm * 2.54mm

SPECIFICATIONS


Material

Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Brass




Electrical

Current Rating : 2 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

► Mating Suggestion : A01, A01a, A03a, A35, B06d, B22b, B27e & B27f series.

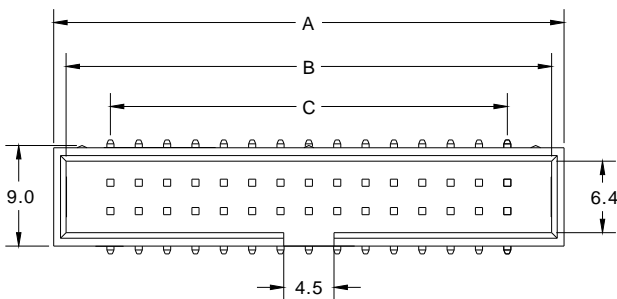

POSITION	A	B	C
6	15.24	13.02	5.08
8	17.78	15.56	7.62
10	20.32	18.10	10.16
12	22.86	20.64	12.70
14	25.40	23.18	15.24
16	27.94	25.72	17.78
20	33.02	30.80	22.86
24	38.10	35.88	27.94
26	40.64	38.42	30.48
30	45.72	43.50	35.56
34	50.80	48.58	40.64
40	58.42	56.20	48.26
44	63.50	61.28	53.34
50	71.12	68.90	60.96
60	83.82	81.60	73.66
64	88.90	86.88	78.74

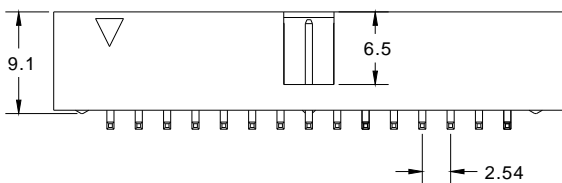

How to order: C03b - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.PACKAGING	5.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 34 40 44 50 60 64	A: BRASS	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A:TUBE WITH PAD B: TUBE W/O PAD C: TAPE & REEL WITH PAD	1. BLACK