

# C64 SINGLE ROW BOX HEADER WITH UNDERCUT R/A

**PITCH: 2.5 mm**



## SPECIFICATIONS

### Material




Insulator : PBT glass reinforced, rated UL 94V-0  
 Contact : Phosphor Bronze or Brass

### Electrical

Current Rating : 2 Amp  
 Contact Resistance : 30 mΩ max.  
 Insulation Resistance : 3000 MΩ min.  
 Dielectric Withstanding Voltage : 500V AC for 1minute  
 Operating Temperature : -40°C to +105°C  
 ► Mating Suggestion : A39 & A67 series.

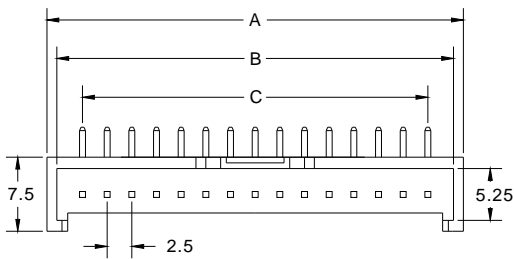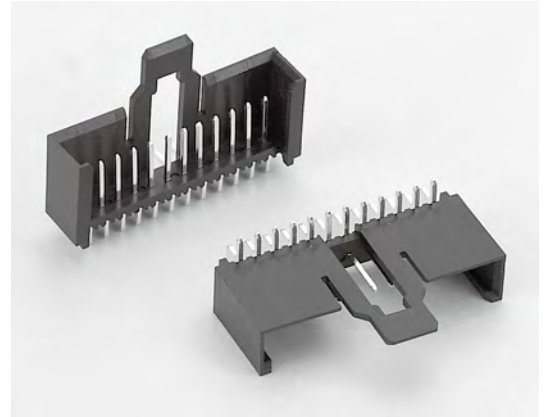

POSITION	A	B	C
2	9.7	7.7	2.5
3	12.2	10.2	5.0
4	14.7	12.7	7.5
5	17.2	15.2	10.0
6	19.7	17.7	12.5
7	22.2	20.2	15.0
8	24.7	22.7	17.5
9	27.2	25.2	20.0
10	29.7	27.7	22.5
11	32.2	30.2	25.0
12	34.7	32.7	27.5
13	37.2	35.2	30.0
14	39.7	37.7	32.5
15	42.2	40.2	35.0
16	44.7	42.7	37.5
17	47.2	45.2	40.0
18	49.7	47.7	42.5
19	52.2	50.2	45.0
20	54.7	52.7	47.5

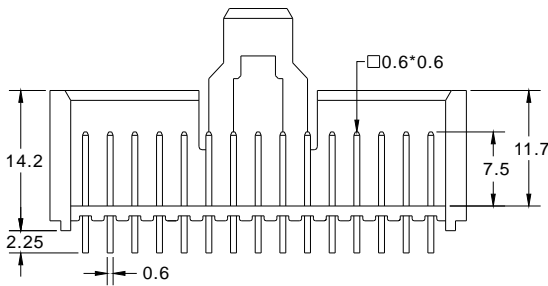

**How to order:** C64 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20	A: BRASS B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK