

A61 IDC TRANSITION PLUG (4 ROWS)

PITCH: 2.0mm



SPECIFICATIONS

Material





Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C
 ► Terminated with L02-1.00mm pitch flat ribbon cable.

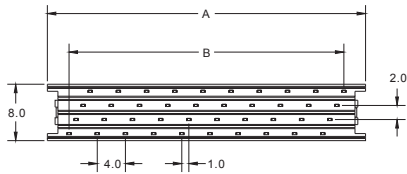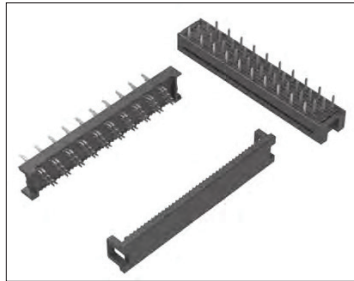


POSITION	A	B
8	13.16	7.00
10	15.16	9.00
12	17.16	11.00
14	19.16	13.00
16	21.16	15.00
20	25.16	19.00
24	29.16	23.00
26	31.16	25.00
30	35.16	29.00
34	39.16	33.00
40	45.16	39.00
44	49.16	43.00
50	55.16	49.00
68	73.16	67.00

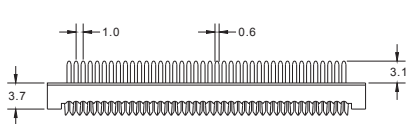


A61 IDC TRANSITION PLUG (4 ROWS)


PITCH: 2.0mm




RECOMMENDED P.C.B. LAYOUT FOR 10



RECOMMENDED P.C.B. LAYOUT FOR 14

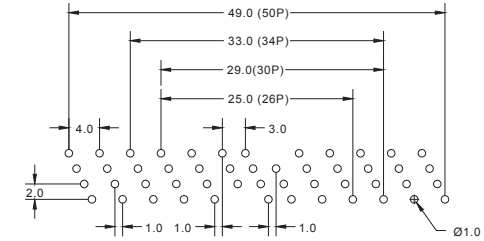

RECOMMENDED P.C.B. LAYOUT FOR 26, 30, 34, 50

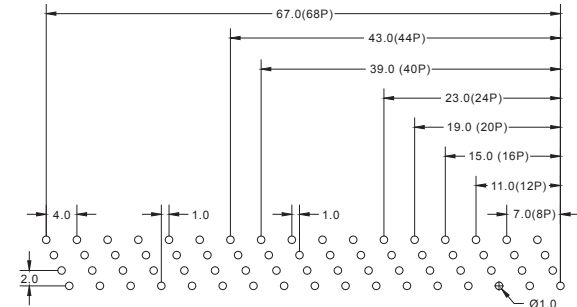

RECOMMENDED P.C.B. LAYOUT FOR 8,12,16,20,24,40,44,68

How to order: A61 - 1 - 2 - 3 - 4 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
08 10 12 14 16 20 24 26 30 34 40 44 50 68	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK