

B28e FEMALE HEADER RIGHT ANGLE

PITCH: 1.27mm

SPECIFICATIONS

Material

Insulator : LCP, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 0.5 Amp




Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.




Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C

► Mating Suggestion : C09b, C09c, C10b & C10d series.

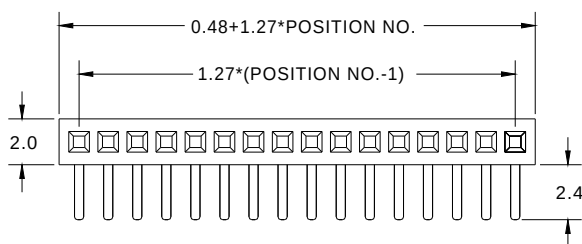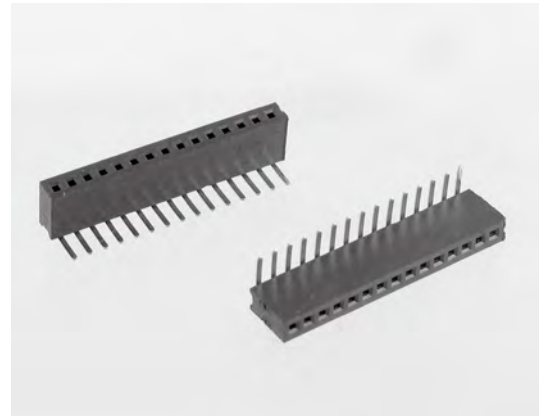

HEIGHT	X	Y
A	2.1	2.3
B	3.4	3.6
C	4.3	4.5

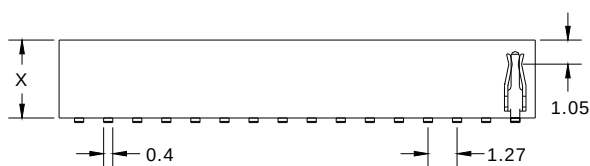

How to order: B28e - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR HEIGHT	5.INSULATOR COLOR
SINGLE ROW 1*2 - 1*50	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: 2.1mm B: 3.4mm C: 4.3mm	1. BLACK