

PITCH: 1.27mm * 1.27mm

SPECIFICATIONS

Material

Insulator : LCP, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp









Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.


Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C

► Mating Suggestion : A52d series.

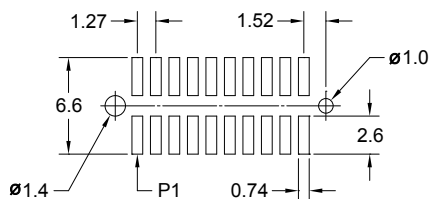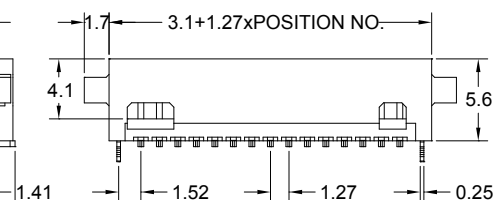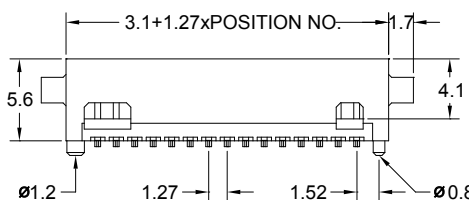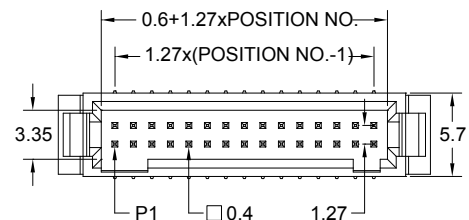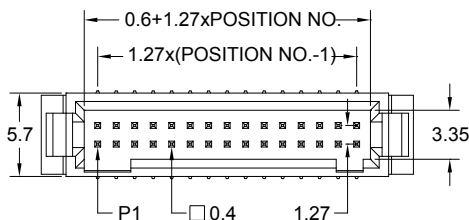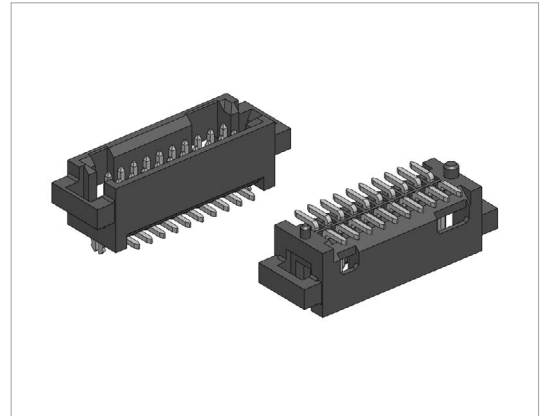

RECOMMENDED P.C.B LAYOUT

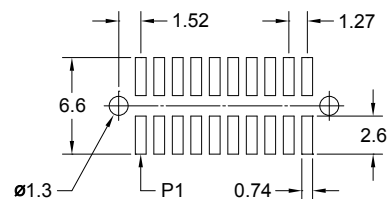

RECOMMENDED P.C.B LAYOUT

How to order: C110b - 1 - 2 - 3 - 4 - 5 - 6 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4. LOCATING PEG	5.PACKAGING	6.INSULATOR COLOR
08 10 12 14 16 20 22 24 26 30 34 40 44 50 60 64 68 80	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: W/O LOCATING PEG B:W PLASTIC LOCATING PEG C: W METAL LOCKING CLIP	A:TUBE WITH PAD B: TUBE W/O PAD C: TAPE & REEL WITH PAD	1. BLACK



DON CONNEX
ELECTRONICS CO., LTD.

T:886 2 86483356 | F:886 2 86485885
e-mail: info@donconnex.com.tw



® Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257